

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS ✓
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
14 December 2000 (14.12.2000)


PCT

(10) International Publication Number
WO 00/75419 A1

- (51) International Patent Classification⁷: D21C 9/06, 9/18 (74) Agent: FURHEM, Hans; Kvaerner Pulping AB, Box 1033, S-651 15 Karlstad (SE).
- (21) International Application Number: PCT/SE00/01108
- (22) International Filing Date: 30 May 2000 (30.05.2000) (81) Designated States (national): CA, US.
- (25) Filing Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data: 4 June 1999 (04.06.1999) SE Published:
9902061-2 — With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- (71) Applicant (for all designated States except US): KVAERNER PULPING AB [SE/SE]; Box 1033, S-651 15 Karlstad (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HANSSON, Stefan [SE/SE]; Syrengatan 1A, S-652 30 Karlstad (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DISTRIBUTION DEVICE FOR A DEVICE FOR DEWATERING PULP

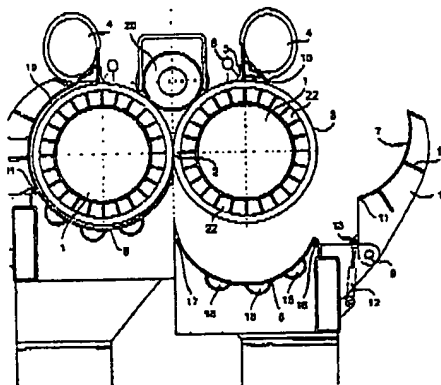

WO 00/75419 A1

(57) Abstract: Device for washing and dewatering a fibre pulp suspension, which device comprises two hollow, circular-cylindrical screen members (1), which screen members contain evacuation chambers, internally in the screen members, for conducting away liquid. The screen members rotate towards each other for the purpose of forming a nip (2), with at least one of the said screen members (1) being arranged in a trough (7, 8) which partially encloses the casing (3) of the screen member and which converges towards the casing of the screen member in the direction of rotation of the screen member. At least one pulp inlet box (4) is arranged at the highest point (1) of the screen members, which are provided with troughs, for the purpose of introducing pulp between the casing (3) of the screen member and its trough (7, 8) for the purpose of forming a fibre pulp web. The pulp inlet box is provided with a pressure equalization section in which a certain equalization of irregularities in pulp qualities takes place before the pulp is fed into the actual washing or dewatering gap. The invention provides improved operability, especially at high pulp concentrations, and reduces the risk of plug formation.

WO 00/75419

PCT/SE00/01108

DISTRIBUTION DEVICE FOR A DEVICE FOR DEWATERING PULP

The present invention relates to a distribution device in accordance with the preamble to Claim 1.

5

STATE OF THE ART

When producing paper pulp from cellulose-containing fibre material, there is a need to wash and dewater the paper pulp at one or more points in the process.

10 A previously known and frequently employed device, termed a wash press, for washing and dewatering paper pulp is shown in SE-C-380 300, SE-C-501 710, US 5,488,900 and SE-C-504 011. The devices which are shown in these publications comprise two cylindrical, rotatable screen members which are arranged in a trough which is in the main convergent but which is partially divergent at the intake for washing liquid. Other examples of known devices are shown in US 4,543,161 and 20 US 5,667,642, with the latter constituting a device in which the screen members rotate in the opposite direction to the conventional direction, i.e., when seen from a short side, the right screen member rotates anticlockwise and the left rotates clockwise.

25

A problem associated with devices of the prior art, which possess two cylindrical screen members which can be rotated towards each other, is that of obtaining an efficient initial distribution of pulp over the whole of the length of the dewatering device. An example of how this problem has been solved is shown in 30 SE-C-500 546, in which a crescent is to distribute the pulp over a line by means of conducting the pulp from a punctate inlet and over the edge of the crescent. The lowest height of the crescent is obtained furthest away from the inlet and consequently a longer supply distance is compensated by a lower bridging height. In these types of solution, practical limits have been set at pulp concentrations of the order of 8%.

35

Other solutions have instead employed a

WO 00/75419

PCT/SE00/01108

- 2 -

distribution screw, similar to US 4,559,104, which distribution screw provides a substantially improved initial distribution over the whole of the width of the wash press.

5 A good initial distribution of the pulp over the whole of the width of the wash press is a very important parameter for succeeding in obtaining a wash press which possesses high operability, i.e. which does not plug up, with the press subsequently having to be
10 stopped in order to remove plugs, and a high dewatering ability. Ways of dealing with the problems involved in assisting uniform distribution of the pulp over the whole of the width of the wash press have exclusively concentrated on solutions corresponding to SE-C-500 546
15 or US 4,559,104, and it has only been possible to discern any improvements in the transitions between pulp inlet boxes and trough sweeps in the form of shorter radii between the pulp inlet boxes and the trough sweeps, corresponding, for example, to
20 US 5,667,642.

In some wash presses, use has instead been made of a very long, gradual decrease in the gap from the inlet box, see, for example, SE 380 300. While this provides an equalizing effect, this very lengthy
25 dewatering and equalizing zone at the same time results in a reduced total displacement ability. That is to say that the washing liquid which is to penetrate through the pulp web is given a much shorter stretch to act on, and the pulp web which is to be washed becomes thicker.
30 An inferior displacement ability results in higher residual contents of chemicals in the pulp, something which is a negative feature, chiefly from the environmental point of view and from the point of view of recovery.

35

BRIEF DESCRIPTION OF THE INVENTION

One aim of the present invention is to provide a wash press whose operability is improved and which can be fed with high concentrations of pulp without

WO 00/75419

PCT/SE00/01108

- 3 -

there being any risk of it plugging up. When use has been made of a pulp inlet box in accordance with the invention, with the inlet box being employed for a wash press having double circular-cylindrical screen members and pulp inlet boxes at the highest point of the screen member, good operability has been obtained with pulp concentrations of the order of 12% in the inlet.

An additional aim is for the pulp web to be relatively rapidly reduced in thickness, thereby providing the possibility of improved washing, i.e. improved displacement ability. It is important to be able to use new washing liquid to rapidly displace the chemicals which are present in the pulp, with these chemicals being returned, where appropriate, to the preceding stage in the pulp preparation process. A device in accordance with the characterizing part of Patent Claim 1 is consequently presented in accordance with the invention.

20 BRIEF DESCRIPTION OF THE FIGURES

The invention will be described below with reference to the figures, of which:

Fig. 1 shows a distribution device according to the invention which is implemented in a wash press and which is seen in cross section.

Fig. 2 shows the distribution device according to the invention on a larger scale.

DETAILED DESCRIPTION OF THE FIGURES

The preferred embodiment of the device according to the invention is shown in Fig. 1 and comprises two hollow, circular-cylindrical screen members 1 which contain a number of evacuation chambers, under the casing surface of the screen member, for conducting away evacuated liquid. The two screen members form a press nip 2 between each other and are arranged to rotate towards each other, with, when seen from the short side, the right screen member rotating clockwise and the left screen member rotating

WO 00/75419

PCT/SE00/01108

- 4 -

counterclockwise. Since the device is in the main symmetrical in a plane of symmetry which is formed by a tangent to the screen members 1 in the nip 2, only one of the symmetrical parts will in principle be described from now on.

The diameter of the screen member 1 is expediently 1.0-2.5 metres. Its casing 3 is furthermore perforated in order to enable liquid to be evacuated from a fibre pulp web which abuts the casing surface and then on into individual evacuation chambers 22, which conduct evacuated liquid away in an axial direction in the screen member. The evacuation chambers 22 communicate with each other by channels, which run in a peripheral direction, being formed between supports (not shown) which are arranged directly under the screen plating resting against the axially directed evacuation chambers.

In the preferred embodiment which is shown in Fig. 1, a pulp inlet box 4 is arranged at each screen member 1. Each pulp inlet box 4 is arranged at 0° in relation to the screen member, with 0° being the highest/topmost point of the screen member and the number of degrees increasing positively in the direction of rotation of the screen member. The inlet box distributes the incoming paper pulp, whose concentration is normally about 1-12%, expediently 3-10%, uniformly over the length of the screen member. A longitudinal gasket 5, which bears against the casing 3 of the screen member and which prevents liquid running from the incoming pulp suspension, against the direction of rotation, and down into outgoing pulp which has already been dewatered, is arranged at the rear edge of the inlet box. A spray 6 is arranged to wash away fibres which may possibly collect on the gasket 5 and to clean the holes or slits in the casing 3 of the screen member. The gasket 5 is expediently constructed such that some fibres which may remain on the screen member are allowed to pass beneath the

WO 00/75419

PCT/SE00/01108

- 5 -

gasket but nevertheless such that it provides good sealing against the pulp in the inlet box 4.

In the preferred embodiment shown in Fig. 1, a trough is furthermore arranged, which trough consists, for each screen member 1, of at least two trough sweeps 7, 8. The top trough sweep 7 encloses the casing of the screen member from the pulp inlet box 4, where, in the operating position, the top trough sweep is in the main arranged so that it seals against the pulp inlet box, or as shown, against a short piece of the top trough sweep 10, which is built as one piece with the pulp inlet box. In the preferred embodiment, the top trough sweep has a lower end point 11 at about 115° (in the operating position) and can be pivoted around an axle 9, which axle is parallel to the casing surface 3 of the screen member and is arranged in the vicinity of the said end point 11. When the top trough sweep is to be pivoted, for access for, for example, cleaning the screen member, a hydraulic cylinder 12 folds the trough sweep outwards by way of a lever arm between the axle 9 and the attachment point 13 of the hydraulic cylinder in the top trough sweep. The top trough sweep is reinforced with external flanges 14, whose number is expediently matched to the width of the trough, which extend along the circle segment of the top trough sweep 7 and which are provided with additional reinforcing, transverse struts 15.

At the end point 11 of the top trough sweep, it bears, in the operating position, in a sealing manner against the bottom trough sweep 8. In this context, the bottom trough sweep 8 extends from the end point of the top trough sweep, along the casing surface 3 and through to the nip 2. It will be understood that the bottom trough sweep 8 cannot reach right into the nip, in association with which it expediently finishes in a position at which the distance between the two screen members 1 corresponds to about twice the gap width in the end point of the bottom trough sweep 8. A number of washing zones 18, which contain inlets (not shown) for

WO 00/75419

PCT/SE00/01108

- 6 -

washing liquid, are arranged in the bottom trough sweep 8. In the embodiment shown, three longitudinal washing zones 18 have been arranged at about 140°, 170° and 200°, respectively. While the number of washing zones 5 is matched to each respective application, 2-3 washing zones are normally employed between approximately 115° to approximately 200°. The bottom trough sweep 8 can be lowered for access and cleaning the casing 3 of the screen member. The bottom trough sweep 8 is lowered 10 using a suitable device, preferably a hydraulic positioning device.

A gap 19 is present between the casing surface 3 of the screen member and the trough 7, 8, which gap is arranged to converge from the pulp inlet box 4 to 15 the nip 2, with, however, it being possible for divergent areas to occur in places, for example at washing zones 18, where washing liquid is to be introduced into the fibre pulp web which is present in the gap. The width of the gap between the walls of the 20 trough and the casing 3 can be regulated so as to achieve optimal dewatering and is adjusted depending on the concentration of the incoming fibre pulp and the desired degree of dewatering. At the inlet, the gap width is typically of the order of size of 25 50-150 millimetres, while the gap width at the outlet is typically of the order of size of 10-40 millimetres. Above the nip 2 is arranged a stripper and conveyor worm 20 which strips off the washed and dewatered fibre pulp web and conveys it away for further treatment in 30 the process for manufacturing paper pulp. Alternatively, or as a complementary addition, a scraper can also be used for detaching the fibre pulp web from the casing 3.

During operation, a paper pulp whose 35 concentration is about 1-12% is conducted into the gap 19 via the pulp inlet box 4. The invention is now described in more detail with reference to Figure 2, which shows the essential features of the invention. The pulp inlet box 4 distributes the pulp over the

WO 00/75419

PCT/SE00/01108

- 7 -

whole width of the wash press, in a manner known per se using a distribution screw corresponding to that shown in US 4,559,104, after which it is fed down towards the circular-cylindrical casing surface of the screen member, via the gap 30, to a first section. The gap 30 is open radially outwards towards the pulp inlet box such that pulp can be conducted to the gap 30 continuously. Directly after this initial supply of the pulp to section 1, a second section of the distribution device begins, which second section is closed at a first distance A calculated from the casing surface of the screen member and in a radial direction out from the centre of rotation of the circular-cylindrical screen member. The second section is arranged after the first section, seen in the direction of rotation of the screen member. In this second section, the pulp is equalized over the width of the wash press while continuously being drawn in towards the trough gap. The distance between the casing of the screen member and the radially external delimitation surface corresponds to the distance A in Figure 2, and, at least at the beginning of the equalization zone in the second section, this distance is at least 50% greater than that of the subsequent trough sweep gap B. The distance A is expediently adjusted to the prevailing pulp concentrations, with A as a rule decreasing as the concentration of the pulp which is conducted to the gap 30 increases. However, it is expedient for the first distance A to be within the interval 150-800% of the second distance B and preferably 500%. In order to ensure that a good equalization effect is obtained, the equalization section should also extend peripherally over an angular distance α which exceeds 5° . The angular distance α expediently lies within the interval $5-30^\circ$, preferably 20° . Too long an equalization zone results in the available washing and displacement zones decreasing, and the size of the equalization zone is consequently a compromise between

WO 00/75419

PCT/SE00/01108

- 8 -

a good initial distribution and washing and displacement results.

The screen members 1 are arranged to rotate at a speed of 5-20 rpm using a suitable drive device. The paper pulp then accompanies the rotation of the screen members, passing into the gap 19 between the perforated casing surface 3 and the walls of the trough 7, 8, in association with which it forms a fibre pulp web which is dewatered due to the gap converging in the direction towards the nip. The liquid which is pressed out of the fibre pulp web is conducted away (not shown) from the device. Washing liquid is introduced into the fibre pulp web at the washing zones 18, where the gap can be somewhat divergent, with washing of the web then taking place. Finally, the pressure in the nip 2 dewateres the fibre pulp web to a concentration which is about 5-20 times higher than the concentration of the incoming paper pulp, for example 1-12% when supplied and 25-40% after the nip. The stripper and conveyor worm 20 strips the fibre pulp web off the casing 3 and conveys it away from the device.

The device according to the invention is not limited by the embodiments which are described above but can be varied within the scope of the subsequent patent claims. For example, the radially external delimitation wall of the equalization zone can consist of smooth sheet metal, with the distance A being continuously reduced to the distance B over the equalization zone. The equalization zone can also, as shown in Figures 1 and 2, be provided with a radially external delimitation wall which, at one bound, half-way into the equalization zone, is angled off more sharply, resulting in a more rapid reduction in the gap being obtained during the later phase of the equalization zone.

WO 00/75419

PCT/SE00/01108

- 9 -

PATENT CLAIMS

1. Device for washing and dewatering a fibre pulp suspension, which device comprises at least one but
5 preferably two circular-cylindrical screen members (1) which are arranged to rotate towards another circular-cylindrical member, preferably a circular-cylindrical screen member, for the purpose of forming a nip (2), with at least one of the said screen members being
10 hollow, allowing evacuation of liquid radially inwards into the screen member, with at least the hollow screen member (1) being arranged in a trough (7, 8) which partially encloses the casing (3) of the screen member and which, in the direction of rotation of the screen
15 member, converges towards the casing of the screen member, and with at least one pulp inlet box (4) being arranged at the screen member (1), which is provided with a trough, for introducing pulp between the casing (3) of the screen member and its trough (7, 8) for the
20 purpose of forming a fibre pulp web,
c h a r a c t e r i z e d
- in that the pulp inlet box contains a first section and in that this first section (30) is open in a radial direction outwards from the centre of rotation of the
25 circular-cylindrical screen member for the purpose of receiving pulp which is conducted to the pulp inlet box,
- in that the pulp inlet box contains a second section and in that this second section is closed at a first
30 distance (A) from the casing surface of the screen member in a radial direction outwards from the centre of rotation of the circular-cylindrical screen member, and in that this second section is arranged after the first section, seen in the direction of rotation of the
35 circular-cylindrical screen member,
- in that the second section merges into a trough sweep which is arranged initially at a second distance (B) from the casing surface of the screen member after the

WO 00/75419

PCT/SE00/01108

- 10 -

second section, seen in the direction of rotation of the circular-cylindrical screen member,

- and in that the first distance exceeds the second distance by at least 50% and in that the second section
5 extends over at least 5° over the periphery of the screen member.

2. Device according to Claim 1,
c h a r a c t e r i z e d i n that the second section
10 extends over the periphery of the screen member within the interval 5-30°, preferably 20°.

3. Device according to Claim 1 or 2,
c h a r a c t e r i z e d i n that the first distance
15 (A) lies within the interval 150-800% of the second distance, preferably 300%.

4. Device according to any one of the preceding claims,
20 c h a r a c t e r i z e d i n that the second section merges into a trough sweep which is arranged initially at a second distance (B) from the casing surface of the screen member after the second section, seen in the
25 direction of rotation of the circular-cylindrical screen member, and in that this transition between the second section and the trough sweep preferably takes place continuously.

5. Device according to any one of the preceding
30 claims,
c h a r a c t e r i z e d i n that the pulp inlet box (4) is arranged to connect to the highest point of the circular-cylindrical screen member.

WO 00/75419

PCT/SE00/01108

1/2

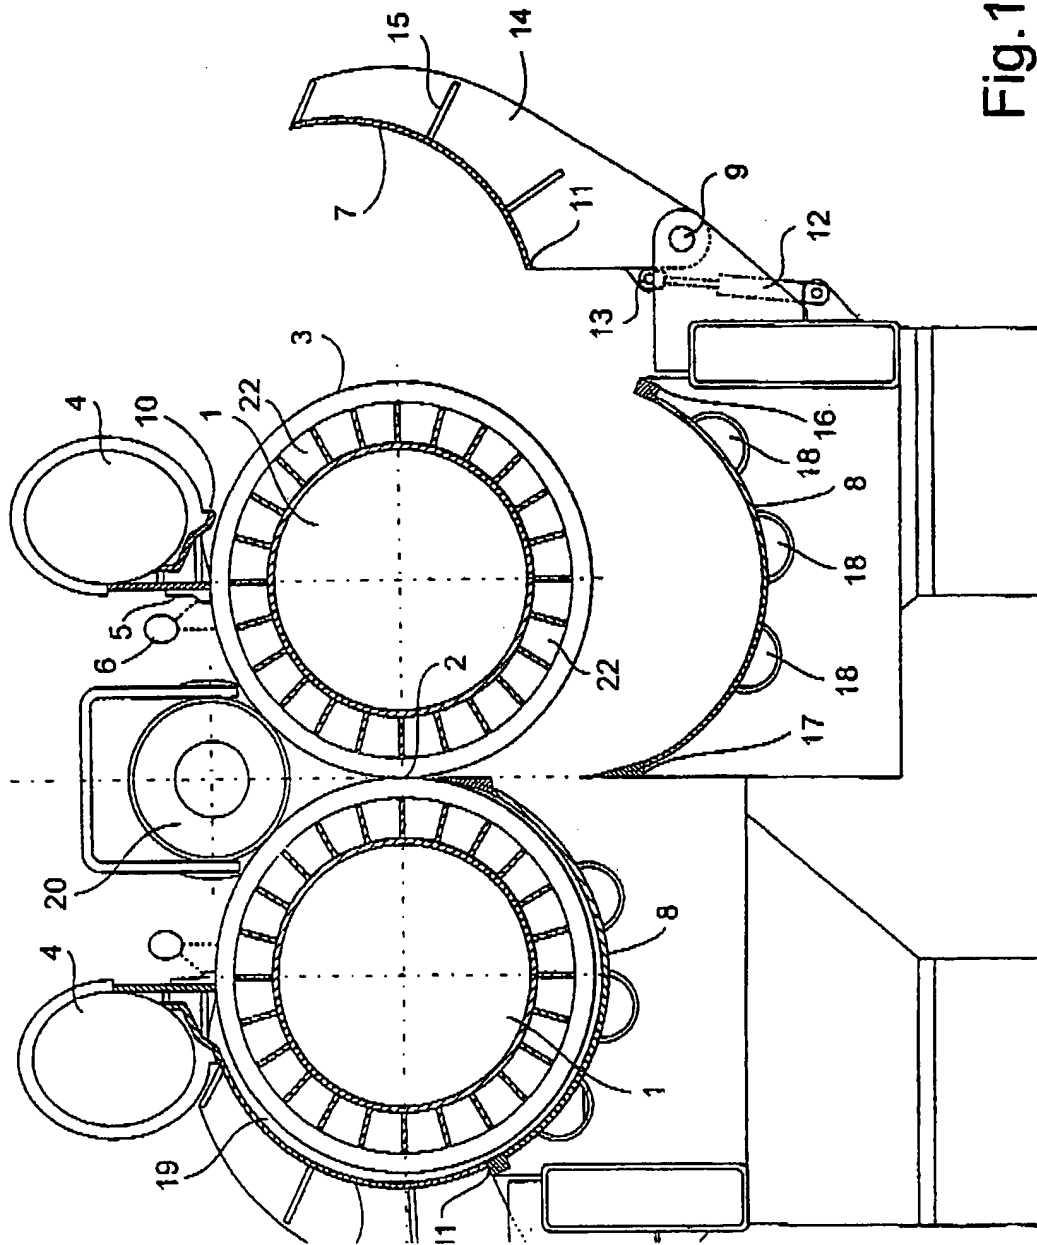


Fig.1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01108

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21C 9/06, D21C 9/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21C, D21D, D21F, B30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4952314 A (KAJ O. HENRICSON ET AL), 28 August 1990 (28.08.90), column 3, line 1 - line 12 --	1-5
A	US 5139671 A (KAJ O. HENRICSON ET AL), 18 August 1992 (18.08.92), column 4, line 37 - line 48 --	1-5
A	US 5571383 A (BORJE FREDRIKSSON ET AL), 5 November 1996 (05.11.96), figure 1, claim 13 --	1-5
A	FI 102977 B (AHLSTROM MACHINERY OY), 31 March 1999 (31.03.99), abstract --	1-5

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

2 October 2000

09-10-2000

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Marianne Bratsberg/ELY
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
 Information on patent family members

01/08/00

International application No.

PCT/SE 00/01108

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4952314	A	28/08/90	AT	68837 T	15/11/91
				CA	1325352 A	21/12/93
				DE	3865807 A	28/11/91
				EP	0315737 A,B	17/05/89
				SE	0315737 T3	
				FI	81136 B,C	31/05/90
				FI	874967 A	12/05/89
				JP	1132890 A	25/05/89
				US	5120398 A	09/06/92
				US	5139671 A	18/08/92
US	5139671	A	18/08/92	AT	68837 T	15/11/91
				CA	1325352 A	21/12/93
				DE	3865807 A	28/11/91
				EP	0315737 A,B	17/05/89
				SE	0315737 T3	
				FI	81136 B,C	31/05/90
				FI	874967 A	12/05/89
				JP	1132890 A	25/05/89
				US	4952314 A	28/08/90
				US	5120398 A	09/06/92
US	5571383	A	05/11/96	AT	167907 T	15/07/98
				AU	664133 B	02/11/95
				AU	5435494 A	24/05/94
				BR	9307364 A	31/08/99
				CA	2144177 A	11/05/94
				CN	1031005 B	14/02/96
				CN	1089674 A	20/07/94
				DE	69319444 D,T	05/11/98
				EP	0667926 A,B	23/08/95
				SE	0667926 T3	
				ES	2117722 T	16/08/98
				FI	952105 A	03/05/95
				JP	8503265 T	09/04/96
				NO	305764 B	19/07/99
				NO	951720 A	04/05/95
				NZ	257658 A	26/11/96
				SE	500546 C	11/07/94
				SE	9203257 A	05/05/94
				WO	9410380 A	11/05/94
				ZA	9307377 A	29/04/94
FI	102977	B	31/03/99	FI	1943 U	09/06/95
				FI	950150 A,V	14/07/96